


Marblue


Large outer wires for increased wear and abrasion resistance.

6X19 (9/9/1) POLY CORE

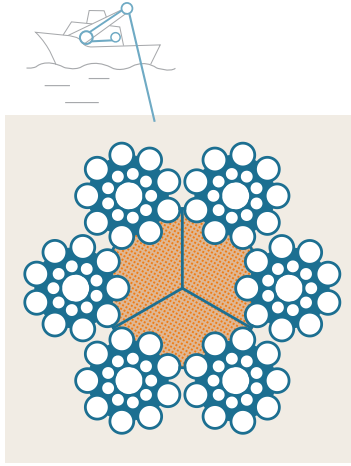

Diameter	Weight	Minimum breaking load	
		Tonnes	kN
mm	kg/100 mtr		
14	70.3	10.4	102
16	90.9	14.9	146
18	116.8	18.8	185
20	144.2	23.2	228
22	175.1	25.6	276
24	205.4	33.5	328
26	241.4	39.3	385
27	261.8	42.4	416
28	279.2	45.6	447
30	315.6	52.3	513
32	370	59.5	584

6X19 (9/9/1) IWRC

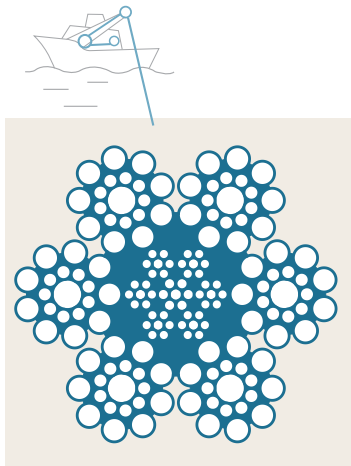

Diameter	Weight	Minimum breaking load	
		Tonnes	kN
mm	kg/100 mtr		
14	82.7	12.6	123
16	102	16.1	157
18	128.9	20.3	199
20	164.6	25.1	246
22	199.7	30.4	298
24	235.4	36.1	354
26	276.9	42.4	416
27	294.9	45.7	448
28	318.9	49.2	482
30	383.2	56.4	554
32	411	64.2	630

This table is for guidance purposes only with no guarantee or warranty (express or implied) as to its accuracy. The products described may be subject to change without notice, and should not be relied on without further advice from Bridon-Bekaert. The cross section image is for reference only. Actual cross sections vary due to diameter. Visit www.bridon-bekaert.com for the most up-to-date data. All products are available with 'Zincal' or Bezinal 3000.