



35LS



35LS is a conventional low rotation resistant rope consisting of three layers of strands the inner two layers spun in the opposite direction to the outer layer of strands manufactured in accordance with EN 12385.

- ✓ Rotation resistant
- ✓ Flexible rope construction
- ✓ For use on single layer drums only

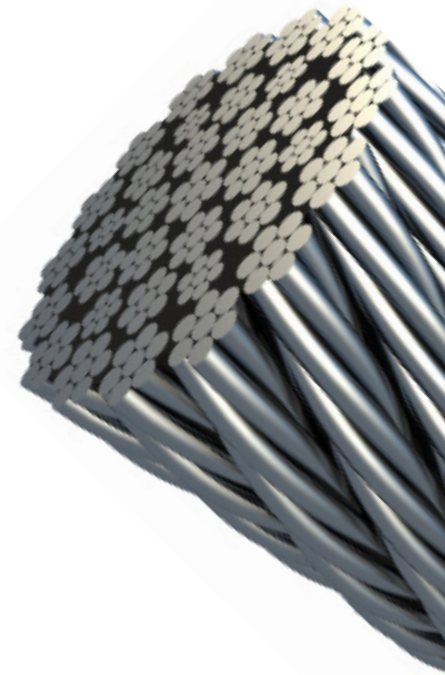

35LS						
Diameter		Nominal length mass		Minimum Breaking Force		
				EIP/1960		
mm	inch	kg/m	lb/ft	kN	Tons (short)	Tonnes (metric)
10		0.45		75.5		7.69
11		0.54		91.3		9.31
12		0.65		109		11.1
13		0.76		128		13.0
14		0.88		148		15.1
15		1.01		170		17.3
16		1.15		193		19.7
18		1.46		244		24.9
19		1.62		272		27.8
20		1.80		302		30.8
21		1.98		333		33.9
22		2.18		365		37.2
23		2.38		399		40.7
24		2.59		435		44.3
25		2.81		472		48.1
26		3.04		510		52.0
28		3.53		592		60.3
32		4.61		773		78.8

This table is for guidance purposes only with no guarantee or warranty (express or implied) as to its accuracy. The products described may be subject to change without notice, and should not be relied on without further advice from Bridon-Bekaert. The cross section image is for reference only. Actual cross sections vary due to diameter. Visit www.bridon-bekaert.com for the most up-to-date data.