


better together

Dramix®



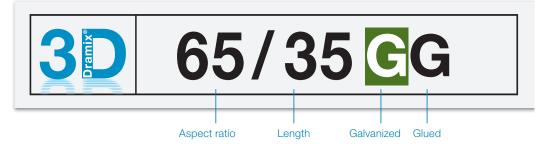

DATASHEET

Characteristics

Material properties

Nom. tensile strength: 224.808494 ksi (1550 MPa)

Young's modulus: 29000 ksi (200000 MPa)

Strain at ultimate strength: 0.8 %

Geometry

Fiber family 3




Length (I) 1.38 in.



Diameter (d) 0.021654 in. (0.55 mm)



Aspect ratio (I/d) 65



Minimum EN 14889-1 dosage

 $25 \text{ lb/yd}^3 (15 \text{ kg/m}^3)$

Fiber network

20146 ft/yd 3 at 25 lb/yd 3 (8032) m/m 3 at 15 kg/m 3) 6672 fibers/lb (14711 fibers/kg)

Dramix® family

3D Typical SFRC applications 4D Supreme serviceability control

5D Advanced structural applications



Product certificates*







* Product certificates are plant specific.

Product conformity

Dramix® conforms to ASTM A820, EN 14889-1 and ISO 13270 Class A.

System certificates





All Dramix® plants are ISO 9001 and ISO 14001 certified.

Packaging





BAGS44 lb
(20 kg)

2,420 lb

Handling





DRAMIX® 3D 65/35GG

The original anchorage

Dramix® 3D is the cost-efficient fiber for standard statically indeterminate concrete structures that are submitted to regular static, fatigue and dynamic loadings.

Glue technology for three-dimensional reinforcement

Dramix® steel fibers are bundled with water-soluble glue. The glue helps avoiding fiber balling during mixing and ensures a homogeneous distribution of fibers throughout the concrete mix.

Bekaert Bekaert construction support

You can count on our support for each step of your project, from concept design to on-site quality support. Our services include recommendations on slab design, construction detailing, concrete optimization and automatic total quality control procedures. We are also happy to share our knowledge with you and your team.

Feel free to ask us for a workshop or training on the topic of steel fiber reinforcement in your offices.

For recommendations on handling, dosing and mixing visit www.bekaert.com/dosingdramix.

Any other specific document or certificate can be found on www.bekaert.com/dramix/downloads.