


better together

Dramix®



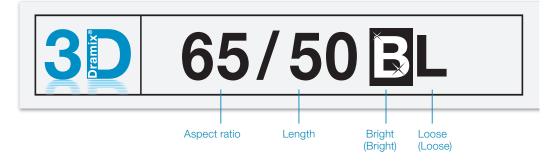

DATASHEET

Characteristics

Material properties

Nom. tensile strength:	1.225 (N/mm ²)
Young's modulus:	200.000 (N/mm ²)
Strain at ultimate strength:	0,8 %

Geometry

fibre family **3** Length (I) 50 mm

50 mm

Aspect ratio (I/d)

Diameter (d)



Minimum EN 14889-1 dosage


65

20 kg/m³

Fibre network 5.759 m/m³ at 20 kg/m³ 5.602 fibres/kg

Dramix[®] family

3D Typical SFRC applications 4D Supreme serviceability control 5D Advanced structural applications



Product certificates*

CE

* Product certificates are plant specific.

Product conformity

Dramix[®] conforms to ASTM A820, EN 14889-1 and ISO 13270 Class A.

System certificates



All Dramix[®] plants are ISO 9001 and ISO 14001 certified.

Packaging



Handling



DRAMIX[®] 3D 65/50BL

The original anchorage

Dramix[®] 3D is the cost-efficient fibre for standard statically indeterminate concrete structures that are submitted to regular static, fatigue and dynamic loadings.

Bekaert construction support

You can count on our support for each step of your project, from concept design to on-site quality support. Our services include recommendations on slab design, construction detailing, concrete optimization and automatic total quality control procedures. We are also happy to share our knowledge with you and your team.

Feel free to ask us for a workshop or training on the topic of steel fibre reinforcement in your offices.

For recommendations on handling, dosing and mixing visit www.bekaert.com/dosingdramix. Any other specific document or certificate can be found on www.bekaert.com/dramix/downloads.